



Cozy N Safe  
Oxford Street, Wolverhampton,  
West Midlands, WV14 7DP, U.K.  
Tel: +44 (0) 1902 494905  
Fax: +44 (0) 1902 490211  
Email: [enq@cozynsafe.com](mailto:enq@cozynsafe.com)

**EZFiX**



## INSTRUCTION MANUAL



EST-229  
Group 2/3  
15kg to 36kg  
(Approximately 4years - 11 years)

# EST-229 Car Seat

## Group 2, 3

(15kg to 36kg/approx. 4 years to 11 years)

Thank you for purchasing this group 2, 3 car seat. If you are not completely satisfied with the car seat or you would like to change any accessory or obtain any help about the car seat, you can contact our customer services department.

## Contents

1. Vital information-READ NOW.....	4-5
2. Safety instruction.....	6
3. Using car seat in this way.....	6-7
4. Parts and interior equipment.....	8
5. Assembling the seat.....	9-10
6. Installation of the seat.....	11-21
6.1 3-point car seat belt installation.....	11-14
6.2 EZFix installation.....	15-21
7. Remove the cover.....	22-24
8. Maintenance and cleaning.....	25
8.1 Daily maintenance.....	25
8.2 Washing instruction.....	25

## Notice

1. This is a “universal” and “semi-universal” child restraint, it is approved to Regulation NO.44,04 series of amendments, for general use in vehicles and it will fit most, but not all, car seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a “Universal” child restraint for this age group.
3. This child restraint has been classified as “Universal” under more stringent conditions than those which applied to earlier designs which do not carry this notice.
4. If in doubt, consult either the child restraint manufacturer or the retailer.

Only suitable if the vehicle is fitted with 3-point safety belts. Approved to UN/ECE Regulation No.16 or other equivalent standards.

This child restraint is classified for “(Semi-universal)” use and is suitable for fixing into the seat positions of the following cars:

CAR	FRONT	REAR	
*	Outer	Outer	Centre
	NO	Yes	NO

Seat positions in other cars may also be suitable to accept this child restraint. If in doubt, consult either the child restraint manufacturer or the retailer.

## 1. Vital information-READ NOW

For your child’s safety, please read these instructions carefully before use and keep them for future reference. Failure to follow the instructions contained in this manual could result in serious injury to your child.

1. This child safety seat can only be used with the harness for children 15 to 36kg in weight (Group II, III:15-36kg).
2. This instruction manual can be retained in the allocated pocket of the child seat for its life period.
3. Do not use this child safety seat in the home. It has not been designed for home use and should only be used in your car.
4. Never leave your child unattended in the child restraint system even for a short time.
5. The child safety seat should be changed when it has been subject to violent stresses in an accident.
6. This child restraint should be securely attached in belted in the vehicle even when not in use. In a crash or sudden stop, an unsecured child safety seat may injure other occupants.
7. Always make sure that any straps holding the seat restraint to the vehicle are tight, any straps restraining the child should be adjusted to the child’s body, and check that the straps are not twisted.
8. IMPORTANT! Ensuring that any lap straps are worn low down, so that the pelvis is firmly engaged.
9. Do not use any load bearing contact points other than those described in the instructions and marked on the child restraint, when in doubt, please contact the child restraint manufacturer.

10. Any luggage or other objects liable to cause injuries in the event of a collision should be properly secured.

11. The rigid items and plastic parts of a child restraint must be so located and installed that they are not liable, during everyday use of the vehicle to become trapped by a moveable seat or in a door of the vehicle.

12. Your child should always be fastened into the car seat as per the instruction to prevent falling.

13. It is dangerous to make any alteration or additions to the device without the approval of the competent authority. It is dangerous to not closely follow the installation instruction

14. This child safety seat is designed for children from 15 to 36 kg. Never overload the child safety seat more than one child or with other loads.

15. The child restraint must not be used without the cover.

16. The seat cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.

17. Before you adjust any movable or adjustable parts of your child safety seat, you must remove your child from the child safety seat.


18. The child safety seat should be kept away from sunlight if the seat is not provided with a textile cover, otherwise it may be too hot for the child's skin.

19. Never use a second-hand product, as you can never be certain what was happened to it.

20. Notice: Do not use in any configuration not shown in the instructions.

## 2. Safety instruction

Only suitable if the approved vehicles are fitted with 3 point safety-belts, approved to UN/ECE Regulation No.16 or other equivalent standards.

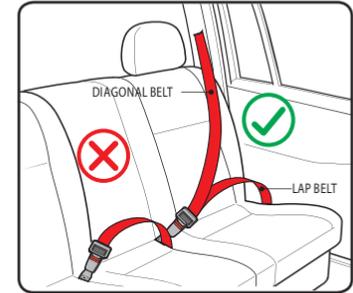


## 3. Using safety seat in this way

Forward facing traffic direction	Correct
Back facing traffic direction	Error
Vehicle is only fitted with 2-point safety belt	Error
Vehicle is fitted with 3-point safety belt	Correct
Seat beside the driver	Error
Rear seat	Correct
Rear middle seats Three-point Belt	Correct

### 3.1 Please carefully implement the Country Traffic Safety Regulations



- Do not install the child safety seat on a front seat with an airbag.
- Please read the vehicle instruction manual carefully on how to use the airbag.

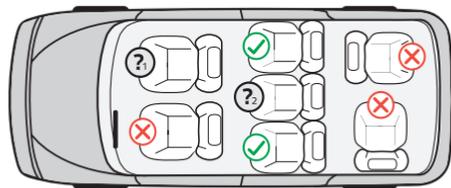


#### NOTICE

- ✔ You can install in this position
- ✘ Unable to install in this position
- ❓ Do not install the child safety seat at the front seat with air bag.
- ❓ Only with the three point safety belt, can this location.


## 4. Parts and interior equipment

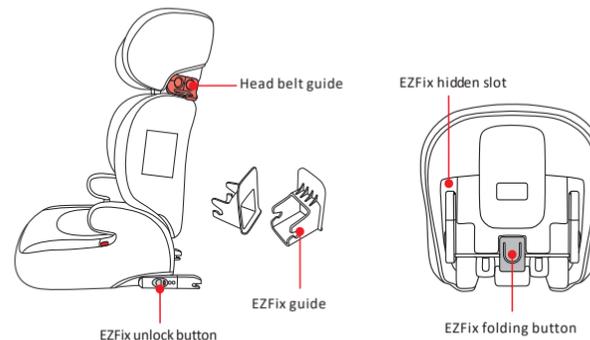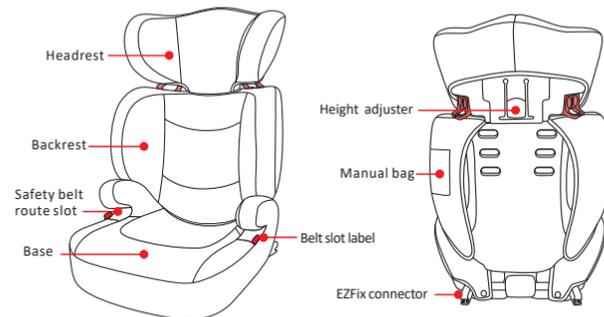

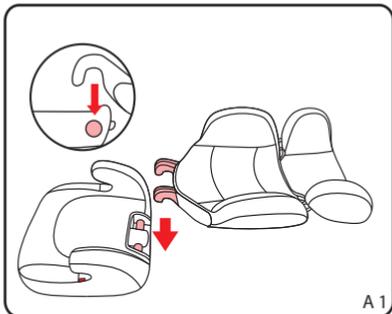


## 5. Assembling the seat

Step 1: Align base and backrest in a straight line.

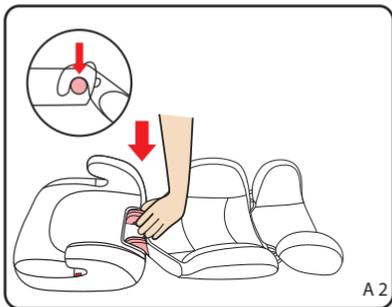

Step 2: Place the hooks inside the base securely.

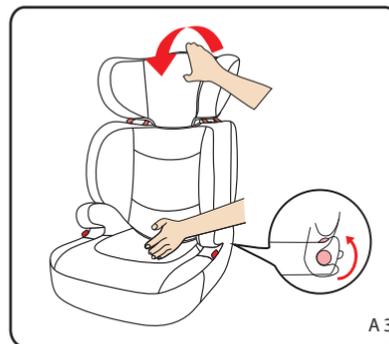


Step 3: Gently keep pressure on hooks as you lift backrest up.

**WARNING: DO NOT FORCE MAY CAUSE DAMAGE.**


## 6. Installation of the seat

Suitable for the child from 15 to 36kgs(4-11years)

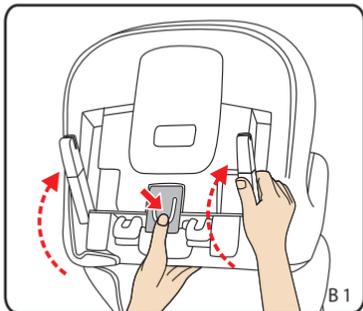


### 6.1 3-point car seat belt installation

Step1: Press the button on the bottom and turn EZFix connector to hide.

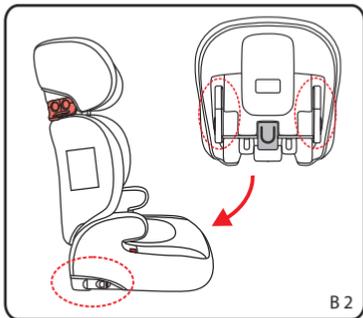

Step 2: Place the child car seat on the vehicle's seat.




Step 3: Follow the B4 routine to install the child car seat.



B5

Step 4: Put the child in the seat and follow B4 routine.

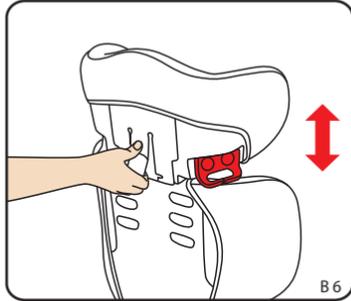

B6

Step 5: Adjust the height of headrest and belt slot to suitable height of child(B6、 B7)



B7




B8

Step 6: Fasten car seat belt and make sure, it is tight enough.





⚠ Notice: If car seat belt is too long, it is NOT suitable to tighten the child car seat. It will not keep the child secure in the event of an impact. Please check that the vehicle belt is suitable before using the child car seat.

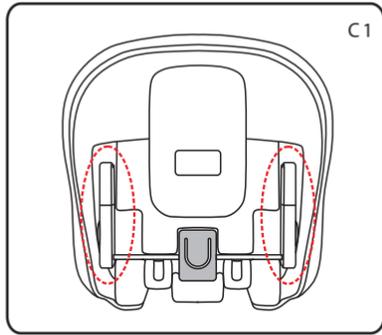


## 6.2 EZFix installation


Step 1: Turn the seat to the bottom and pull out EZFix connector.(C1、C2)

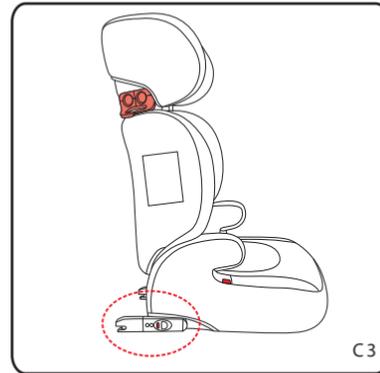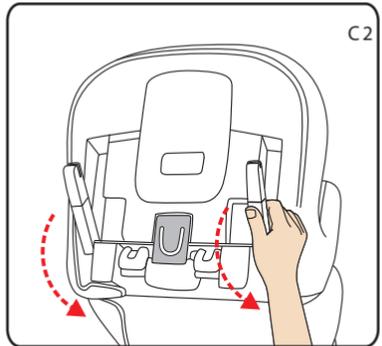


Step 2: Turn EZFix connector to 180 degrees.(C3)

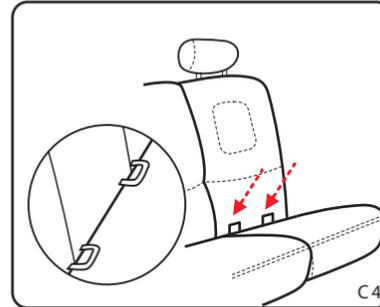


Step 3: Find out EZFix connections in the car.

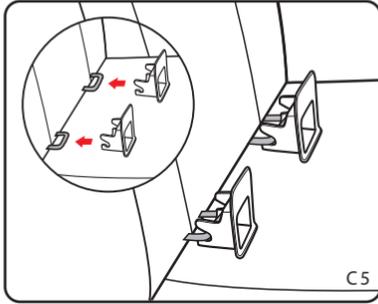

Step 4: Insert EZFix guide into EZFix connection

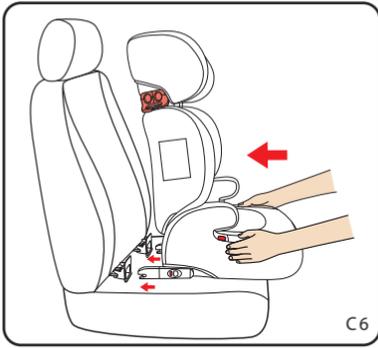

Step 5: Place the child car seat on the vehicle seat and push back in the direction of the EZFix guides. Insert the EZFix connectors into the guides.

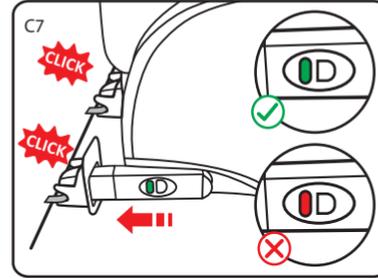


Step 6: Ensure that the EZFix locking system turns green to confirm that the child seat is firmly connected.



Step 7: Put the child onto the child car seat.




Step 8: Pull car seat belt following the belt route and lock.

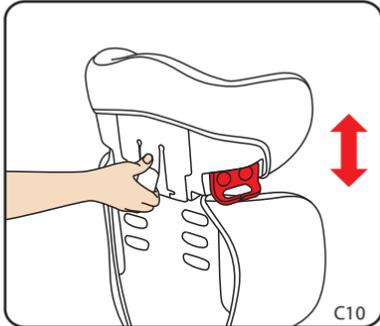


Step 9: Adjust the height of headrest and belt slot to a suitable height for the child.(C10,C11)




Step 10: Fasten car seat belt and make sure, it is tight enough.

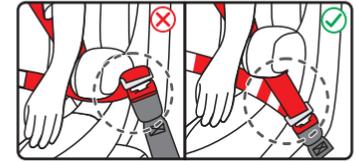


⚠ Notice: If car seat belt is too long, it is NOT suitable to tighten the child car seat. It will not keep the child secure in the event of an impact. Please check that the vehicle belt is suitable before using the child car seat.

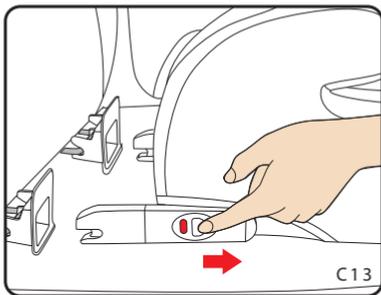

Step 11: To release the child car seat pull on the locking mechanism. when you hear a “Click” and the indicator turns red and the EZFix connector has been released. Then pull your child car seat forward.

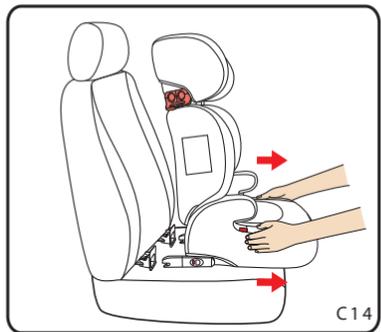


Step 12: Take child seat away from car seat.

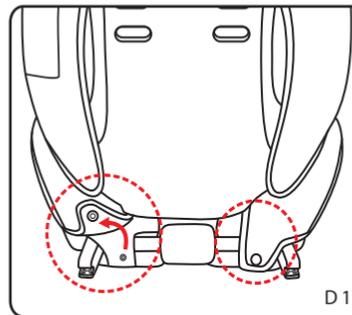


## 7. Remove the cover


Step 1: Turn the seat to the back and unlock the snap fastener.

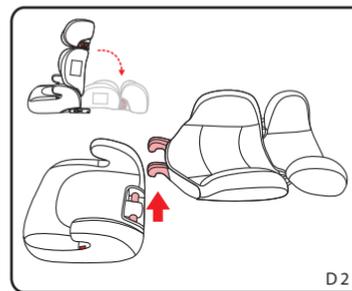


Step 2: Separate the backrest from the booster by unhooking the two parts. see D2

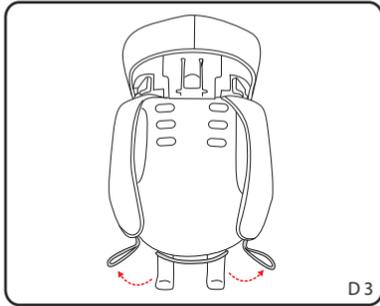

Step 3: Remove the elastic loops attaching the fabric cover.

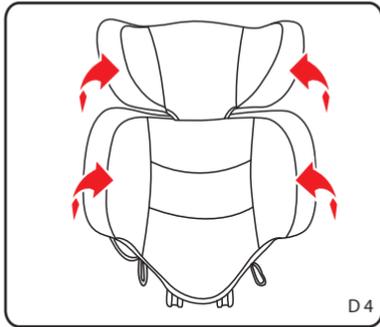

Step 4: Pull all directions to take out the cover(D4).

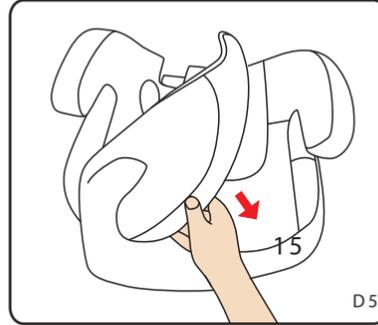

Step 5: Take off the fabric cover.

Follow in reverse order and repeat the procedure to put the fabric cover back on.

## 8. Maintenance and cleaning

### 8.1 Daily maintenance

1. Ensure to periodically check the child seat during daily use. The child seat should be replaced after an accident.
2. Please keep this child seat in a dry and ventilated place to avoid damp mold.
3. If the child seat becomes dusty, clean the seat belt and the plastic pieces by swiping them with a damp sponge and allowing them to dry naturally.
4. For cleaning the entire child seat fabric cover, please refer to the 8.2 washing instructions.

### 8.2 Washing instruction

Never use any solvent, chemical detergent or lubricant on any part of your child seat.



Hand wash,  
water  
temperature  
below 30



Do not bleach



Dry clean, any  
solvent except  
trichloroethylene



Do not tumble dry



Do not iron